

Service bulletin

This service bulletin from the Hesston Manufacturing Company detailing flotation and leveling specification for the Model "200" Swathers. This publication funded by the National Historical Publications and Records Commission through the Kansas State Historical Records Advisory Board.

Creator: Hesston Manufacturing Company


Date: June 20, 1957

Callnumber: Hesston Public Library

KSHS Identifier: DaRT ID: 448473

Item Identifier: 448473

www.kansasmemory.org/item/448473

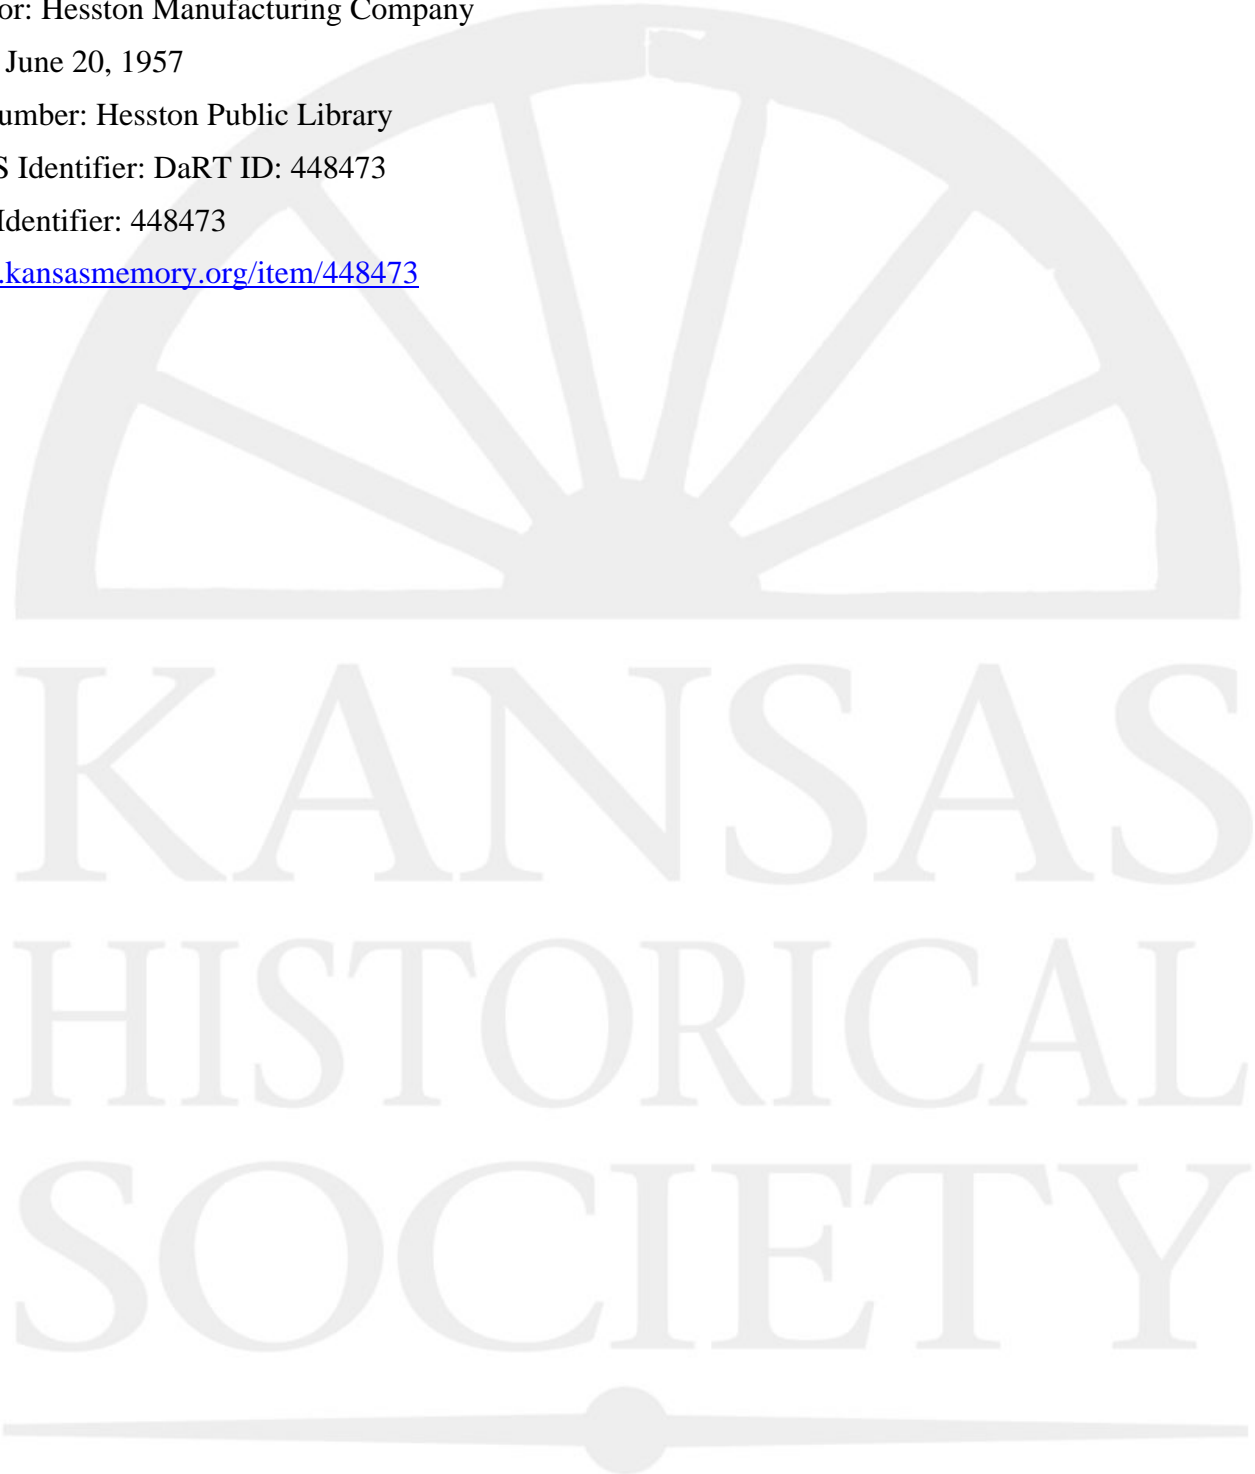



SERVICE BULLETIN NO. 19

June 20, 1957

SUBJECT: Header Flotation and Leveling on Model
"200" Swathers

In swathing alfalfa hay or any crop that is cut close to the ground, it is very important that the platform leveling adjustment bolt be removed. (See Figure 10, page 11 in "200" Manual) Removal of this bolt will permit either end of the cutterbar to float up and down independently of the other and also the entire bar can float in the usual manner. This exclusive feature is a big advantage over uneven ground, corrugation, irrigation borders, etc.

The flotation springs should be adjusted with the leveling bolt removed. Set the springs up until approximately 75 pounds will lift either divider point.

HESSTON MANUFACTURING CO., INC.
HESSTON, KANSAS